

Pluma pescante para Motor 3 Tons




Especificaciones Técnicas

Capacidad de Carga	6614 lb / 3000 kg	Altura de Izaje Estandar (Customizable)	5 ft / 1.5 m
Normas	ANSI/ASME PALD2009 (5511 lb / 2500 kg)	Garantía	3 Year

	POS.1	POS.2	POS.3	POS.4
MAX	2204 lb / 1000 kg	3306 lb / 1500 kg	4409 lb / 2000 kg	6613 lb / 3000 kg
Suggested according to Norm	1836 lb / 833 kg	2755 lb / 1250 kg	3675 lb / 1667 kg	5511 lb / 2500 kg
Recomendado Según Norma				

	Max. Height profile (P) Altura máx. perfil (P)	Max. Height Hook (G) Altura máx. Gancho (G)	Total Extension Extensión Total	Boom Dimension (X) Dimensión Brazo Móvil (X)
Position 1 Posición 1	101.4 in / 2575 mm	86.6 in / 2200 mm	58.7 in / 1492 mm	30.6 in / 777 mm
Position 2 Posición 2	97.2 in / 2470 mm	82.3 in / 2090 mm	50.6 in / 1285 mm	22.4 in / 570 mm
Position 3 Posición 3	92.3 in / 2345 mm	77.8 in / 1975 mm	42.1 in / 1070 mm	13.9 in / 355 mm
Position 4 Posición 4	87.9 in / 2235 mm	72.8 in / 1850 mm	34.4 in / 875 mm	6.30 in / 160 mm

	Exterior Width (E) Ancho Exterior (E)	Exterior Width (I) Ancho Interior (I)	Base Dimension Dimensión Base Móvil (Y)
Position 1 Posición 1	37.5 in / 955 mm	28.5 in / 725 mm	32.0 in / 815 mm
Position 2 Posición 2	35.0 in / 890 mm	26.1 in / 665 mm	24.2 in / 615 mm
Position 3 Posición 3	34.0 in / 865 mm	25.2 in / 640 mm	16.3 in / 415 mm
Position 4 Posición 4	30.1 in / 815 mm	23.2 in / 590 mm	8.26 in / 210 mm

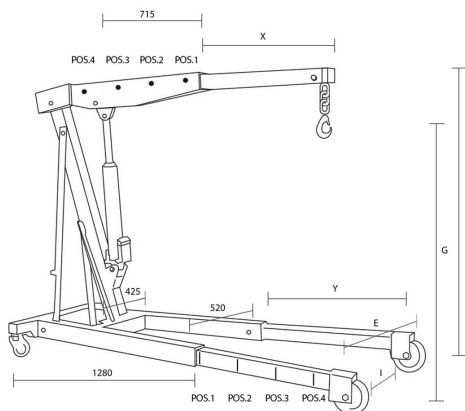

Dimensions in mm / Dimensiones en mm

Peso & Dimensiones

Peso Total

293 lbs / 133 Kg

Referential Images / Imágenes Referenciales

Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso