




Winche Hidraulico de 20 Tons para ambiente Marino

Copyright: The pictures contained in this site belong to Prowinch LLC and are protected by copyright under national and international law. This information may not be reproduced, adapted or modified without the written consent of Prowinch LLC. The use of these images and texts implies that you should mention Prowinch LLC as owner. By consulting this site or downloading any information you agree to these conditions.

Especificaciones Técnicas

Capacidad de Carga	1st Layer: 58863 lb / 26.7 t , Last Layer Capacity: 44092 lb / 20 t	Número de Capas	4
Velocidad /min	0~35 ft/min 0~11 m/min	Numero de Velocidades	Variable Speed
Clase de Servicio	100% Duty Cycle	Marca y modelo del motor	Generic
Tipo de Motor	Y250M-4-H	Potencia Motor	55 kW
Freno Motor	Counter Balance Valve 150% (Automatic)	Protección IEC Motor	IP67
Control	Lever Valve on Winch	Presión Aceite	15 Mpa
Flujo Aceite	200 L/min	Freno al Reductor	Inner Disc Brake 150% (Automatic)
Freno Tambor	Drum band brake >150% (Manual)	Embriague	Manual Jaw Clutch
Cable Recomendado	Ø 1 1/8 in Ø30 mm 4 layers 100 m	Tipo de Tambor	Plain
Temperatura	-10°C ~ 40°C	Garantía	3 Year
BD ø Diámetro Tambor	Ø 510 mm	FD Diámetro Flange Tambor	Ø 900 mm
DL Ancho Tambor	450 mm		

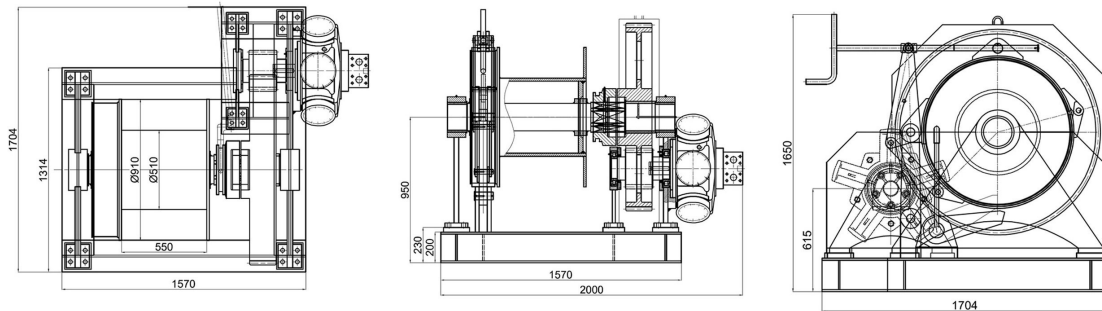

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso