




## Winche Hidraulico de 30 Tons para ambiente Marino

Copyright: The pictures contained in this site belong to Prowinch LLC and are protected by copyright under national and international law. This information may not be reproduced, adapted or modified without the written consent of Prowinch LLC. The use of these images and texts implies that you should mention Prowinch LLC as owner. By consulting this site or downloading any information you agree to these conditions.

### Especificaciones Técnicas

<b>Capacidad de Carga</b>	1st Layer: 88184 lb / 40 t , Last Layer Capacity: 66138 lb / 30 t t	<b>Número de Capas</b>	4
<b>Velocidad /min</b>	0~35 ft/min   0~11 m/min	<b>Numero de Velocidades</b>	Variable Speed
<b>Clase de Servicio</b>	100% Duty Cycle	<b>Marca y modelo del motor</b>	Generic
<b>Tipo de Motor</b>	Y280S-4-H	<b>Potencia Motor</b>	75 kW
<b>Freno Motor</b>	Counter Balance Valve 150% (Automatic)	<b>Protección IEC Motor</b>	IP67
<b>Control</b>	Lever Valve on Winch	<b>Presión Aceite</b>	15 Mpa
<b>Flujo Aceite</b>	280 L/min	<b>Freno al Reductor</b>	Inner Disc Brake 150% (Automatic)
<b>Freno Tambor</b>	Drum band brake >150% (Manual)	<b>Embriague</b>	Manual Jaw Clutch
<b>Cable Recomendado</b>	Ø 1 3/8 in   Ø35 mm   4 layers   100 m	<b>Tipo de Tambor</b>	Plain
<b>Temperatura</b>	-10°C ~ 40°C	<b>Garantía</b>	3 Year
<b>BD ø Diámetro Tambor</b>	Ø 580 mm	<b>FD Diámetro Flange Tambor</b>	Ø 1000 mm
<b>DL Ancho Tambor</b>	500 mm		

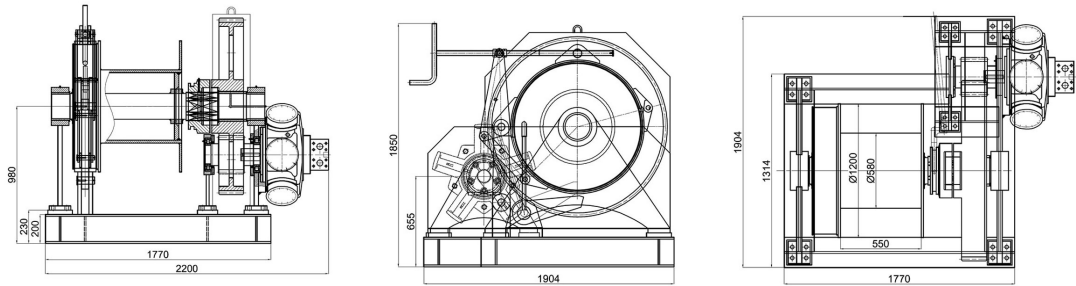

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso