


## Yugo Viga Spreader 1 ton - Largo 48 in

### Características Esenciales


- Alta capacidad de carga
- Spread ajustable
- Construccion de Alta Calidad
- Norma ASME B30.20 AND ASME BTH-1



### Especificaciones Técnicas

|                    |                  |        |                            |
|--------------------|------------------|--------|----------------------------|
| Capacidad de Carga | 2000 lbs / 1 ton | Normas | ASME B30.20 AND ASME BTH-1 |
| Garantía           | 3 Year           |        |                            |

**PWYG**

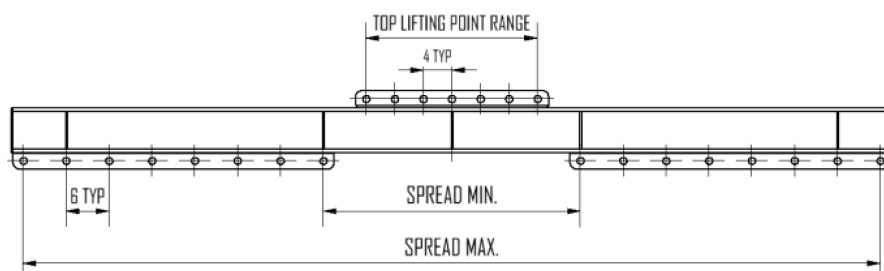

| MODEL        | Cap (lb) | MAX SPREAD (in) | MIN SPREAD (in) | TOP LIFTING POINT RANGE (in) | WEIGHT (lbs) |
|--------------|----------|-----------------|-----------------|------------------------------|--------------|
| PWYG1000-48  | 1000     | 48              | 12              | 16                           | 81           |
| PWYG1000-72  | 1000     | 72              | 36              | 16                           | 111          |
| PWYG1000-96  | 1000     | 96              | 36              | 24                           | 151          |
| PWYG1000-120 | 1000     | 120             | 36              | 24                           | 186          |
| PWYG2000-48  | 2000     | 48              | 12              | 16                           | 83           |
| PWYG2000-72  | 2000     | 72              | 36              | 24                           | 116          |
| PWYG2000-96  | 2000     | 96              | 36              | 24                           | 192          |
| PWYG2000-120 | 2000     | 120             | 36              | 24                           | 239          |
| PWYG4000-48  | 4000     | 48              | 12              | 16                           | 105          |
| PWYG4000-72  | 4000     | 72              | 36              | 24                           | 149          |
| PWYG4000-96  | 4000     | 96              | 36              | 24                           | 241          |
| PWYG4000-120 | 4000     | 120             | 36              | 24                           | 364          |
| PWYG8000-72  | 8000     | 72              | 36              | 32                           | 285          |
| PWYG8000-96  | 8000     | 96              | 36              | 32                           | 375          |
| PWYG8000-120 | 8000     | 120             | 36              | 32                           | 537          |



Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso